




**PRO SIDE CLAMP
PANEL/CABLE SPACING**

Accomodate cone tip screw with through hole of this diameter.
Small Side Clamp: 3/16" (5.0mm)
Medium Side Clamp: 9/32" (7.0mm)
Large Side Clamp: 9/32" (7.0mm)

Hole center line to panel edge shall be:
Small Side Clamp: 3/16" (4.75mm)
Medium Side Clamp: 9/32" (7.15mm)
Large Side Clamp: 3/8" (9.5mm)

Center line cable spacing can be determined by adding 0.35 inches (9.0mm) to the panel width.
NOTE: This is important for pier location mounting and not important if cables are hanging from track.

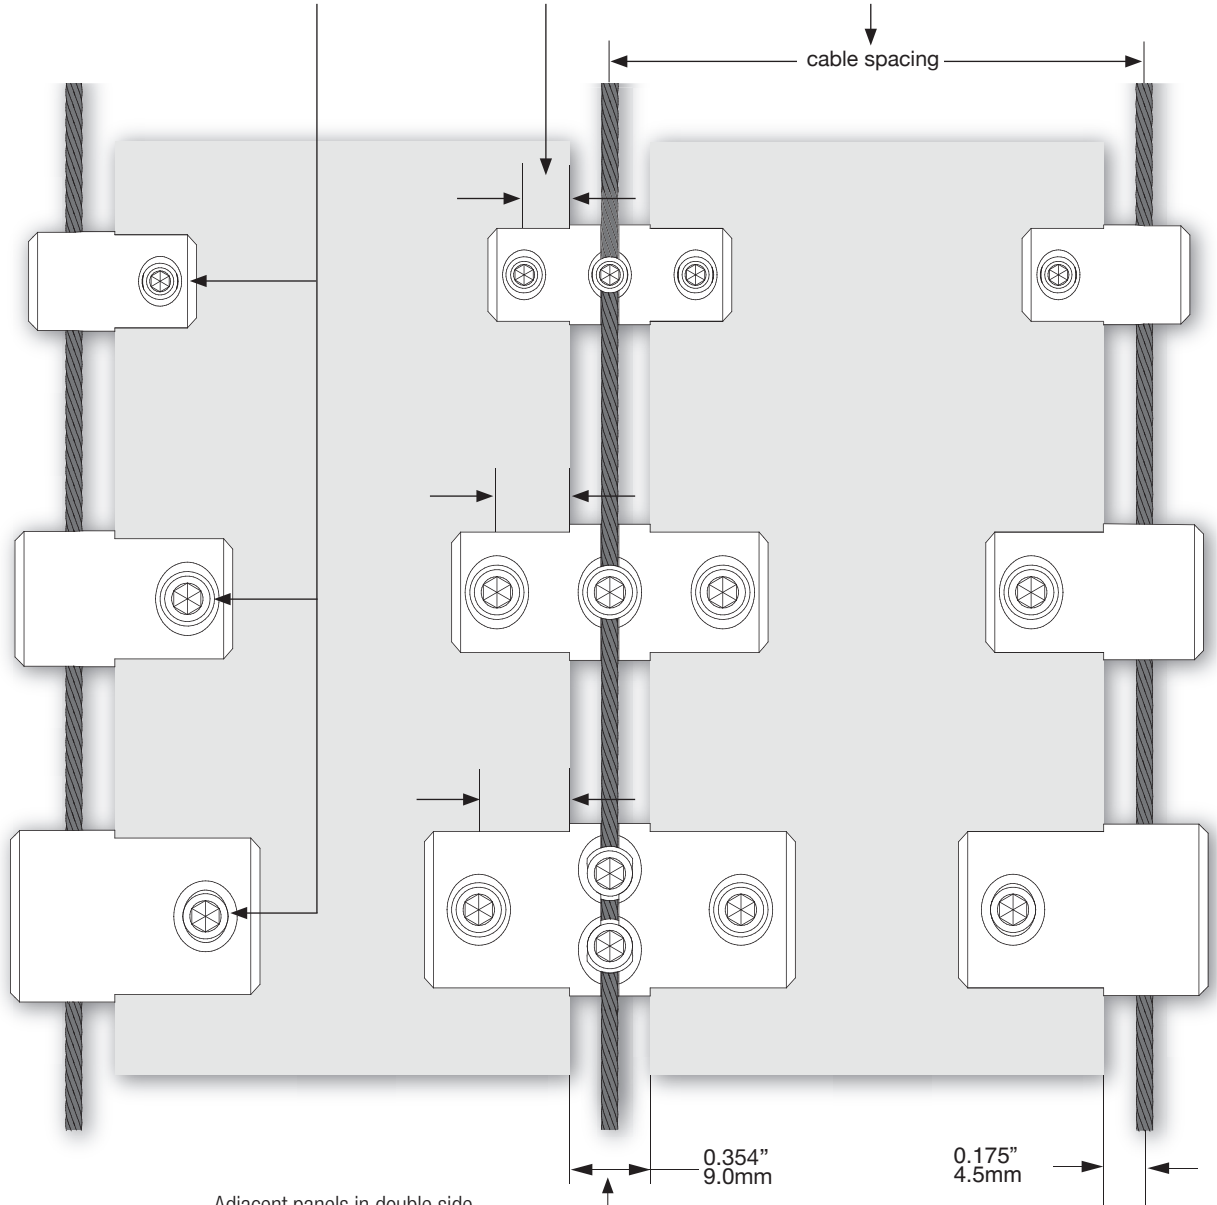

Adjacent panels in double side clamps will create a "gutter" of 0.354" (9.0mm). This is consistent of all three sizes of Pro Side Clamps.

ASHanging.com
866.935.6949