




Wall Hanger Fix U5163


PARTS LIST

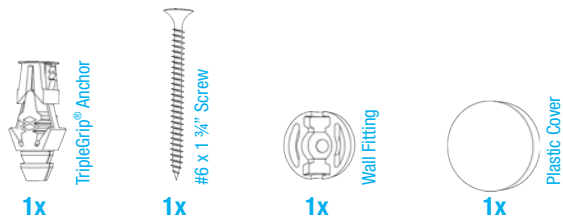


Warning

The Wall Hanger Fix is supplied with a flat head screw and TripleGrip® plastic anchor that are suitable for mounting the wall hanger to gypsum panels, lathe and plaster, concrete, masonry block, etc. Property damage and personal injuries can occur from mounting failure. To prevent such failure, it is the responsibility of the installer to select a suitable fastener for a specific installation.

Wall Fitting

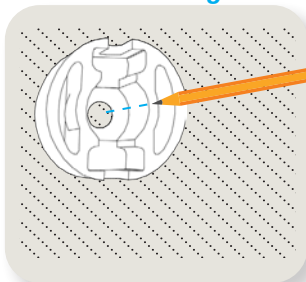


Pilot Hole

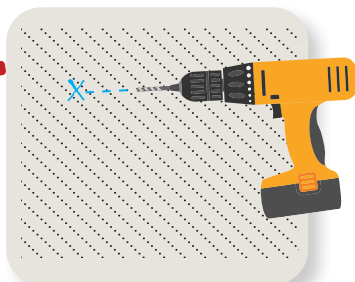


1 Wall Fitting Installation

- With a pencil, mark the location where you want to install the Wall Hanger Fix.
- Use a stud finder or drill 1/16" pilot holes to probe for the wall structure. If no structure is present, expand the hole to 1/4" and insert the supplied anchor.
- Fasten the wall fitting to the prepared hole with the supplied screw.


Anchor

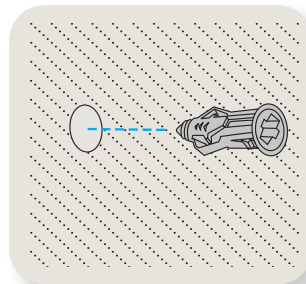


Fasten Wall Fitting

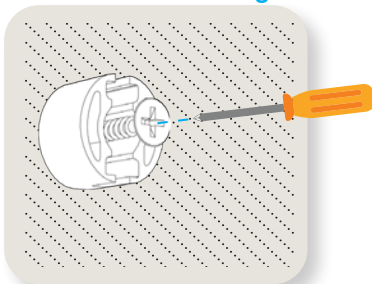

Insert Cable

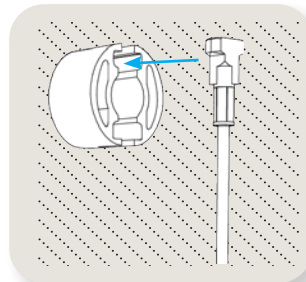


Adjust Hanging Hook

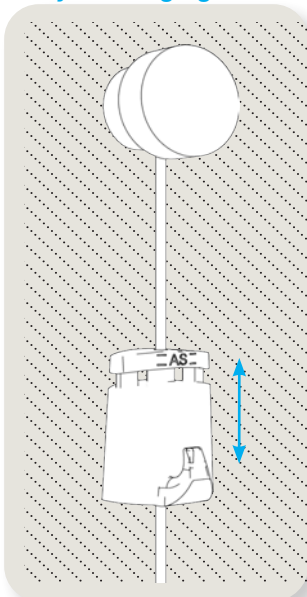

2 Hanging Items

- Insert the Twist-End cable into the wall fitting.
- Place the plastic cover on the wall fitting.
- Insert the hanging hook onto the cable and adjust the height of your suspended item.

Place Cover

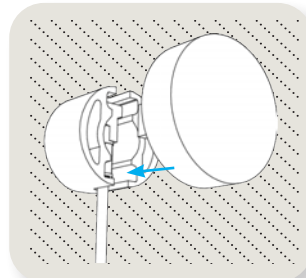

www.ashanging.com/en/wall-hanger-fix