




### Classic Wall Track A1004



#### PARTS LIST

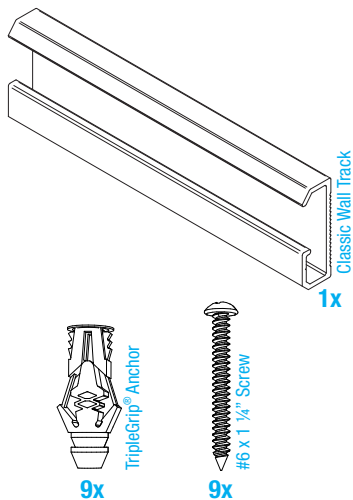

#### Warning

The track is supplied with screws and TripleGrip® plastic screw anchors that are suitable for mounting the track to gypsum panels, lathe and plaster, concrete, masonry block, etc. All holes in track should be filled with a suitable screw/fastener combination.

Property damage and personal injuries can occur from track mount failure. To prevent such failure it is the responsibility of the installer to select a suitable fastener for a particular installation.

### 1 Orientation

- Normal track orientation is horizontal with large lip at the bottom.



#### NOTE

While the illustrations to the left feature P-End cable, this track is also compatible with rods.

### 2 Check Walls

- The wall should be straight, Classic Wall Track is rigid and does not easily bend.




### 3 Measure

- Measure your wall segments. For a perfect look that blends into the decor, install your tracks wall-to-wall.
- Consider End-Caps in your measurements if you use them.




#### TIP

To join two tracks at an inside/outside 90° corner, cut both ends at 45° to have a perfect fit.

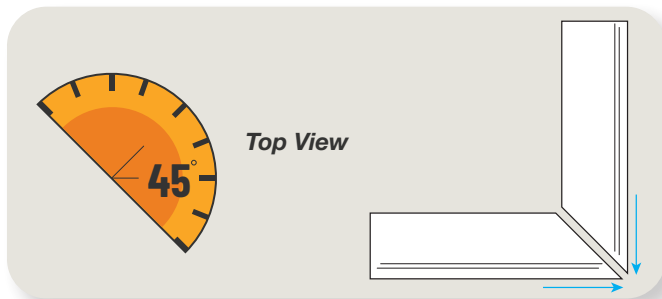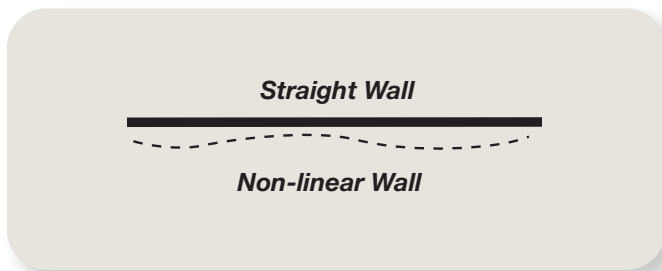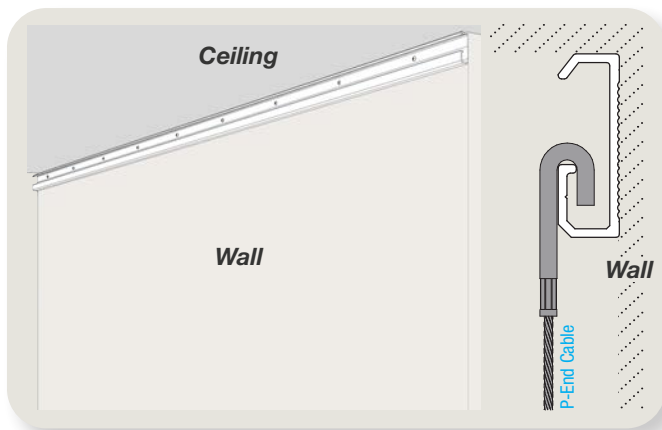

Proper Blade





## 4 Cut or Trim Track

- Cut track as needed and remove any burrs. Straight and burr-free cuts will make seams between adjoining track almost invisible.



### TIP

Cut the track with a hack saw and miter box or power miter saw with proper blade.



## 5 Mark and Prepare Holes

- Trial place each track length and mark mounting holes.




### TIP


Use a level to make certain track is level.

- Use a stud finder or drill 1/16" pilot holes to probe for structure.

Anchor




Colored Screw




## 6 Mounting Track

- If no structure is present, expand the hole to 1/4" and insert supplied anchors.
- Fasten track to prepared holes with supplied fasteners.

End-Cap



Tensioned

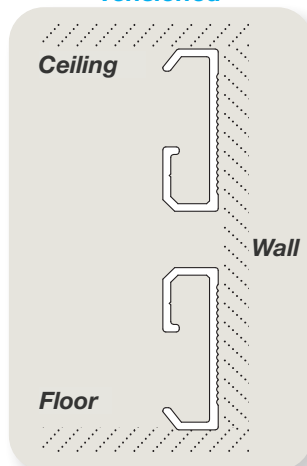

## 7 Options

- Finish exposed ends with End-Caps (sold separately).
- For Tensioned Cables/Rods you will need a second, lower track. Mount that one opposite of the upper track with the large lip at the top. Use Cable Tensioners or Rod-End Hangers (sold separately).