




Click Rail Track A1050



PARTS LIST

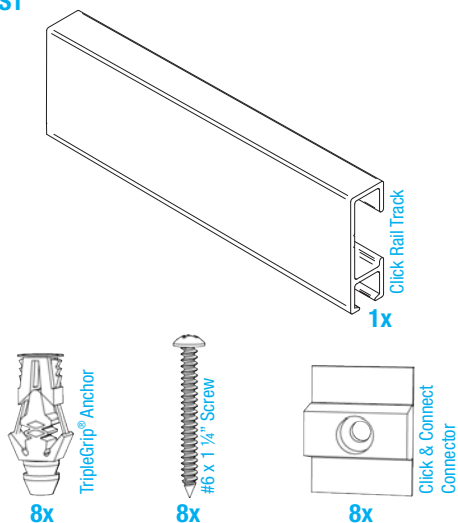

Warning

The track is supplied with screws, TripleGrip® plastic screw anchors and mounting Click & Connect Connectors that are suitable for mounting the track to gypsum panels, lathe and plaster, concrete, masonry block, etc. All mounting Connectors must be used and spaced evenly along the length of the track.

Property damage and personal injuries can occur from track mount failure. To prevent such failure it is the responsibility of the installer to select a suitable fastener for a specific installation.

1 Orientation

- Normal track orientation is horizontal with small opening oriented to the bottom.



NOTE

While the illustrations to the left feature a Twist-End cable, this track is also compatible with T-End cables and Twist-End rods.

2 Check Walls

- Click Rail Track is rigid and does not easily bend. To correctly fix the track on the Connectors, the wall must be straight and even.

Straight/Even Wall



Non-linear Wall

3 Measure



- Measure your wall segments. For a perfect look that blends into the decor, install your tracks wall-to-wall.
- Consider End-Caps and Corner Connectors in your measurements if you use them.



TIP

To join two tracks at an inside/outside 90° corner use our Corner Connector (sold separately).

Proper Blade

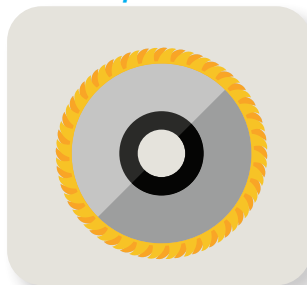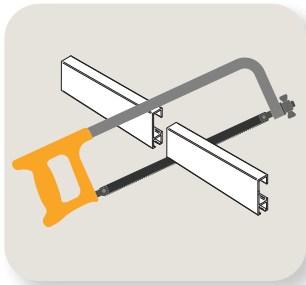

4 Cut or Trim Track



- Cut track as needed and remove all burrs. Straight and burr-free cuts will make seams between adjoining track almost invisible.



TIP

Cut the track with a hack saw and miter box or power miter saw with proper blade.

Connector

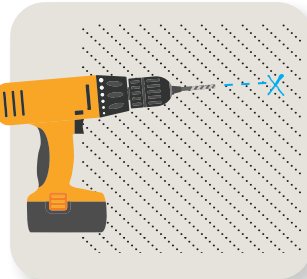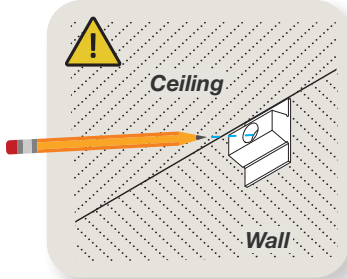

5 Mark and Prepare Holes



IMPORTANT

All 8 mounting Click & Connect Connectors must be used.


- Locate the first and last Connectors approximately 1" from the end of a track length. Each subsequent Connector is located about 10" down the track.
- Use a stud finder or drill 1/16" pilot holes to probe for wall structure.
- If no structure is present, expand the hole to 1/4" and insert supplied anchors.




TIP

When mounting tracks end to end, position Connectors so that two adjacent tracks will share one Connector.


Anchor

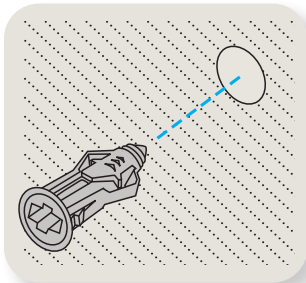

Adjacent Tracks

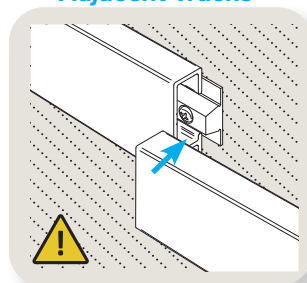


Screw/Connector

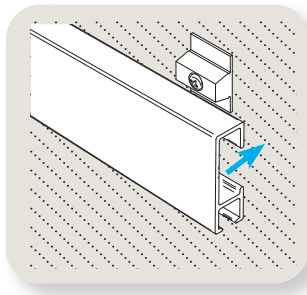


6 Track Installation

- Fasten Connectors to prepared holes with supplied fasteners.
- Click track over installed Connectors with a solid rap of a hand at each Connector.

End-Cap

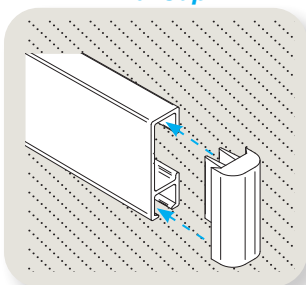

Tensioned

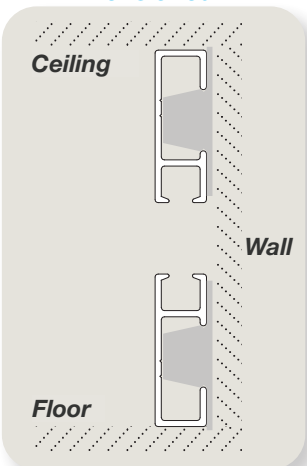

7 Options

- Finish exposed ends with End-Caps (sold separately).
- For Tensioned Cables you will need a second, lower track. Mount that one opposite of the upper track with the small opening at the top. Use Cable Tensioners (sold separately).