




## Casso® Display Rail K3100

### PARTS LIST

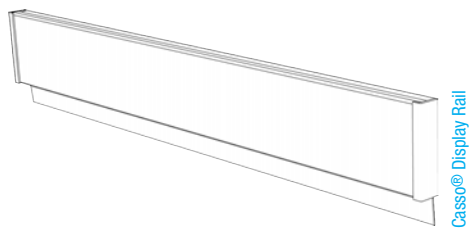


1x




TripleGrip® Anchor



#6 x 1 1/4" Screw



Click & Connect Connector



End-Caps



### Warning

The track is supplied with screws, TripleGrip® plastic screw anchors and mounting Click & Connect Connectors that are suitable for mounting the track to gypsum panel, lathe and plaster, concrete, masonry block, etc. All mounting Connectors must be used and spaced evenly along the length of the rail.

Property damage and personal injuries can occur from track mount failure. To prevent such failure it is the responsibility of the installer to select a suitable fastener for a particular installation.

## 1 Check Walls

- Casso Display Rail is rigid and does not easily bend. To correctly fix the track on the connectors, the wall must be straight and even.


*Straight/Even Wall*



*Non-linear Wall*

## 2 Orientation

- Normal track orientation is horizontal with the lip oriented to the bottom.

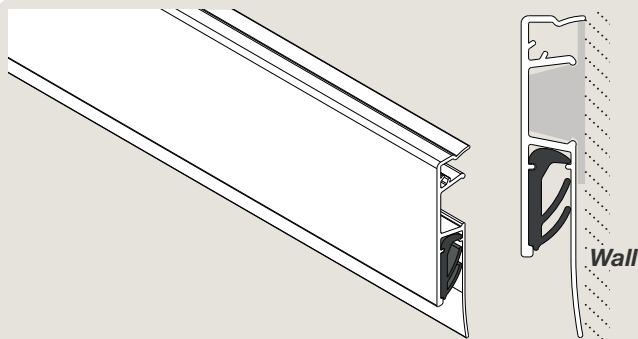

Wall

## 3 Measure & Cut Track as Needed



- Measure your wall segments. For a perfect look that blends into the decor, install your rails wall-to-wall.
- Consider End-Caps in your measurements if you use them.
- Cut track as needed and remove all burrs. Straight and burr-free cuts will make seams between adjoining rails almost invisible.





### TIP

Cut the track with a hack saw and miter box or power miter saw with proper blade.


*Proper Blade*




### Connector




### Anchor




### Adjacent Rails




### Screw/Anchor




### Rail Installation



### End-Cap

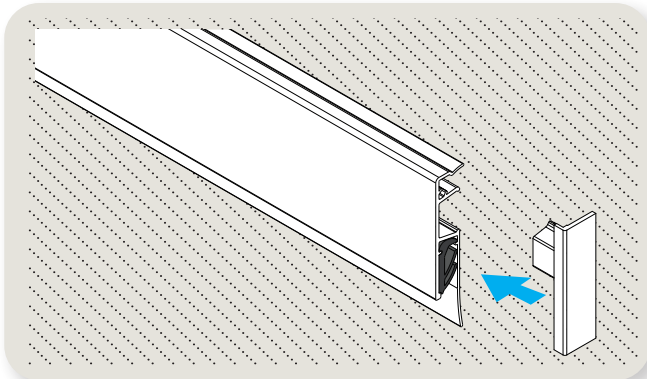

### Accessories

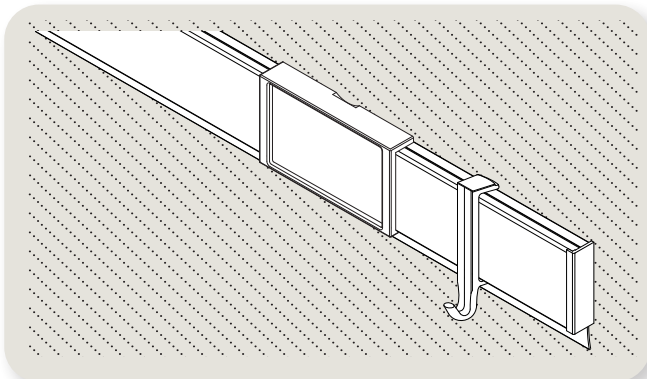

## 4 Mark and Prepare Holes



### IMPORTANT

All included Click & Connect Connectors must be used.

- Locate the first and last Connectors approximately 1" from the end of a rail length. Place these at approximate equal intervals between the first and last Connector locations.
- Use a stud finder or drill 1/16" pilot holes to probe for wall structure.
- If no structure is present, expand the hole to 1/4" and insert supplied anchors.

### TIP

When mounting tracks end to end, position Connectors so that two adjoining tracks will share one Connector.



- Use a level to make certain rail will be mounted level.

## 5 Rail Installation

- Fasten Connectors to prepared holes with supplied fasteners.
- Click Casso Display Rail over installed Connectors with a solid rap of a hand at each Connector.



### NOTE

2 feet (24") Casso Display Rail shipped with two Connectors, 6 feet (72") Casso Display Rail shipped with four Connectors.


## 6 Options

- Finish exposed ends with provided End-Caps.




### NOTE

Optional Label Frame and J Hanger are also available. They can be attached along the entire length of the installed Rail. Label Frame holds a label in place behind a clear plastic shield. J Hanger can hold keys, baseball cap, etc. Sold separately.



Casso® Label Frame



Casso® J Hanger